


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [5601230600](#)
Status: **Active**
Overview: [DuraClik Connector System](#)
Description: [DuraClik ISL Wire-to-Board Receptacle Housing, Single Row, White, 6 Circuits](#)

Documents:

3D Model	Packaging Specification 5601230900-PK (PDF)
Drawing (PDF)	Packaging Specification PK-560123-001-002 (PDF)
Product Specification 5601230900- PS (PDF)	Test Summary 5601230400-TS (PDF)
Product Specification PS-560123-002-001 (PDF)	Test Summary 5601230600-TS (PDF)
Application Specification AS-560123-001-001 (PDF)	RoHS Certificate of Compliance (PDF)

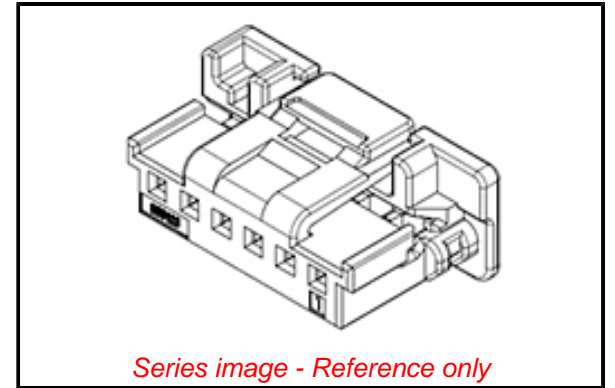

General

Product Family	Crimp Housings
Series	560123
Application	Signal, Wire-to-Board
Overview	DuraClik Connector System
Product Name	DuraClik
UPC	889056009546

Physical

Circuits (maximum)	6
Color - Resin	White
Gender	Receptacle
Glow-Wire Capable	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Resin	PBT
Net Weight	0.373/g
Number of Rows	1
Packaging Type	Tray
Panel Mount	No
Pitch - Mating Interface	2.00mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +125°C

Solder Process Data

Lead-freeProcess Capability	N/A
-----------------------------	-----

Material Info

Reference - Drawing Numbers

Application Specification	AS-560123-001-001
Packaging Specification	5601230900-_PK, PK-560123-001-002
Product Specification	5601230900-_PS, PS-560123-002-001
Sales Drawing	SD-560123-004
Test Summary	5601230400-TS, 5601230600-TS

EU ELV

Compliant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
ED/61/2018 (27 June
2018)

Halogen-Free

Status

Not Low-Halogen

Need more information on product environmental compliance?

Email productcompliance@molex.com
Please visit the [Contact Us](#) section for any non-product compliance questions.

China ROHS	Green Image
ELV	Compliant
RoHS Phthalates	Not Contained

Search Parts in this Series

[560123](#) Series

Mates With

DuraClik Right-Angle Header [502352](#)

DuraClik Vertical Header [560020](#)

Use With

DuraClik ISL Terminal [560124](#)
DuraClik ISL Retainer [560125](#)