



1 2 3 4 5 6 7

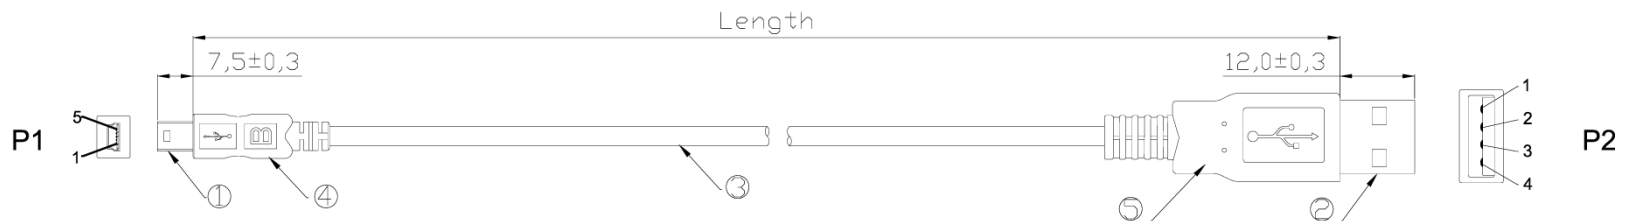


Cable white print
 USB CABLE AWM 2725 VW-1 30V 80°C 28AWG/1PR AND 28AWG/2C

PIN ASSIGNMENT

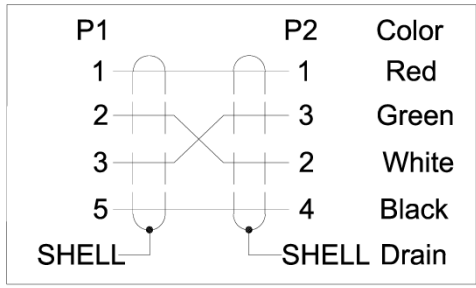

WSW P/N	Jacket color	Length(mm)
AK672M-1	Black	1000±30
AK672M-2	Black	2000±50
AK672M-3	Black	3000±50
AK672M-5	Black	5000±50

Electrical test:
 1. 100% short, open, miswire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Dielectric test: DC 300V

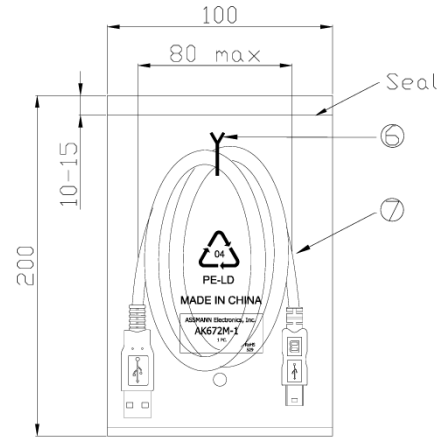

1PC/PE Bag

NO.	NAME.	Q'TY	SPECIFICATION
⊗	PE Bag	1/10	Clear size: 230x300x0.05mm Print black "MADE IN CHINA" + "10PCS"
⊙	PE Bag	1	Clear size: 100x200x0.05mm Print black "MADE IN CHINA"+ "1PC"
⊖	TIE	1	Black L=100mm
⊕	Out Jacket	6g	Black PVC-40P (Mold No.: WM-40)
④	Out Jacket	6g	Black PVC-40P (Mold No.: WM-88)
③	Cable	1	Black USB1.1 UL2725 28#/1P+28#/2C+AEB OD:3.8mm
⊕	CONN	1	USB A MALE SHELL:Nickel PIN:G/F 4PCS Type Insulator color: White
①	CONN	1	USB MINI 5P MALE SHELL:Nickel PIN:G/F Insulator color: Black

RoHS compliant
 Unit: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	09.05.2014	Amy
					Approved	09.05.2014	Amy
							ASSMANN WSW-No.
							AK672M-x
DIM	TOL						Drawing-No.
							ASS 7130 CA
							rev00
Angle	TOL	Id.	Modification	Date	Name		Replace
							Sheet



1 2 3 4 5 6 7