


1 2 3 4 5 6 7

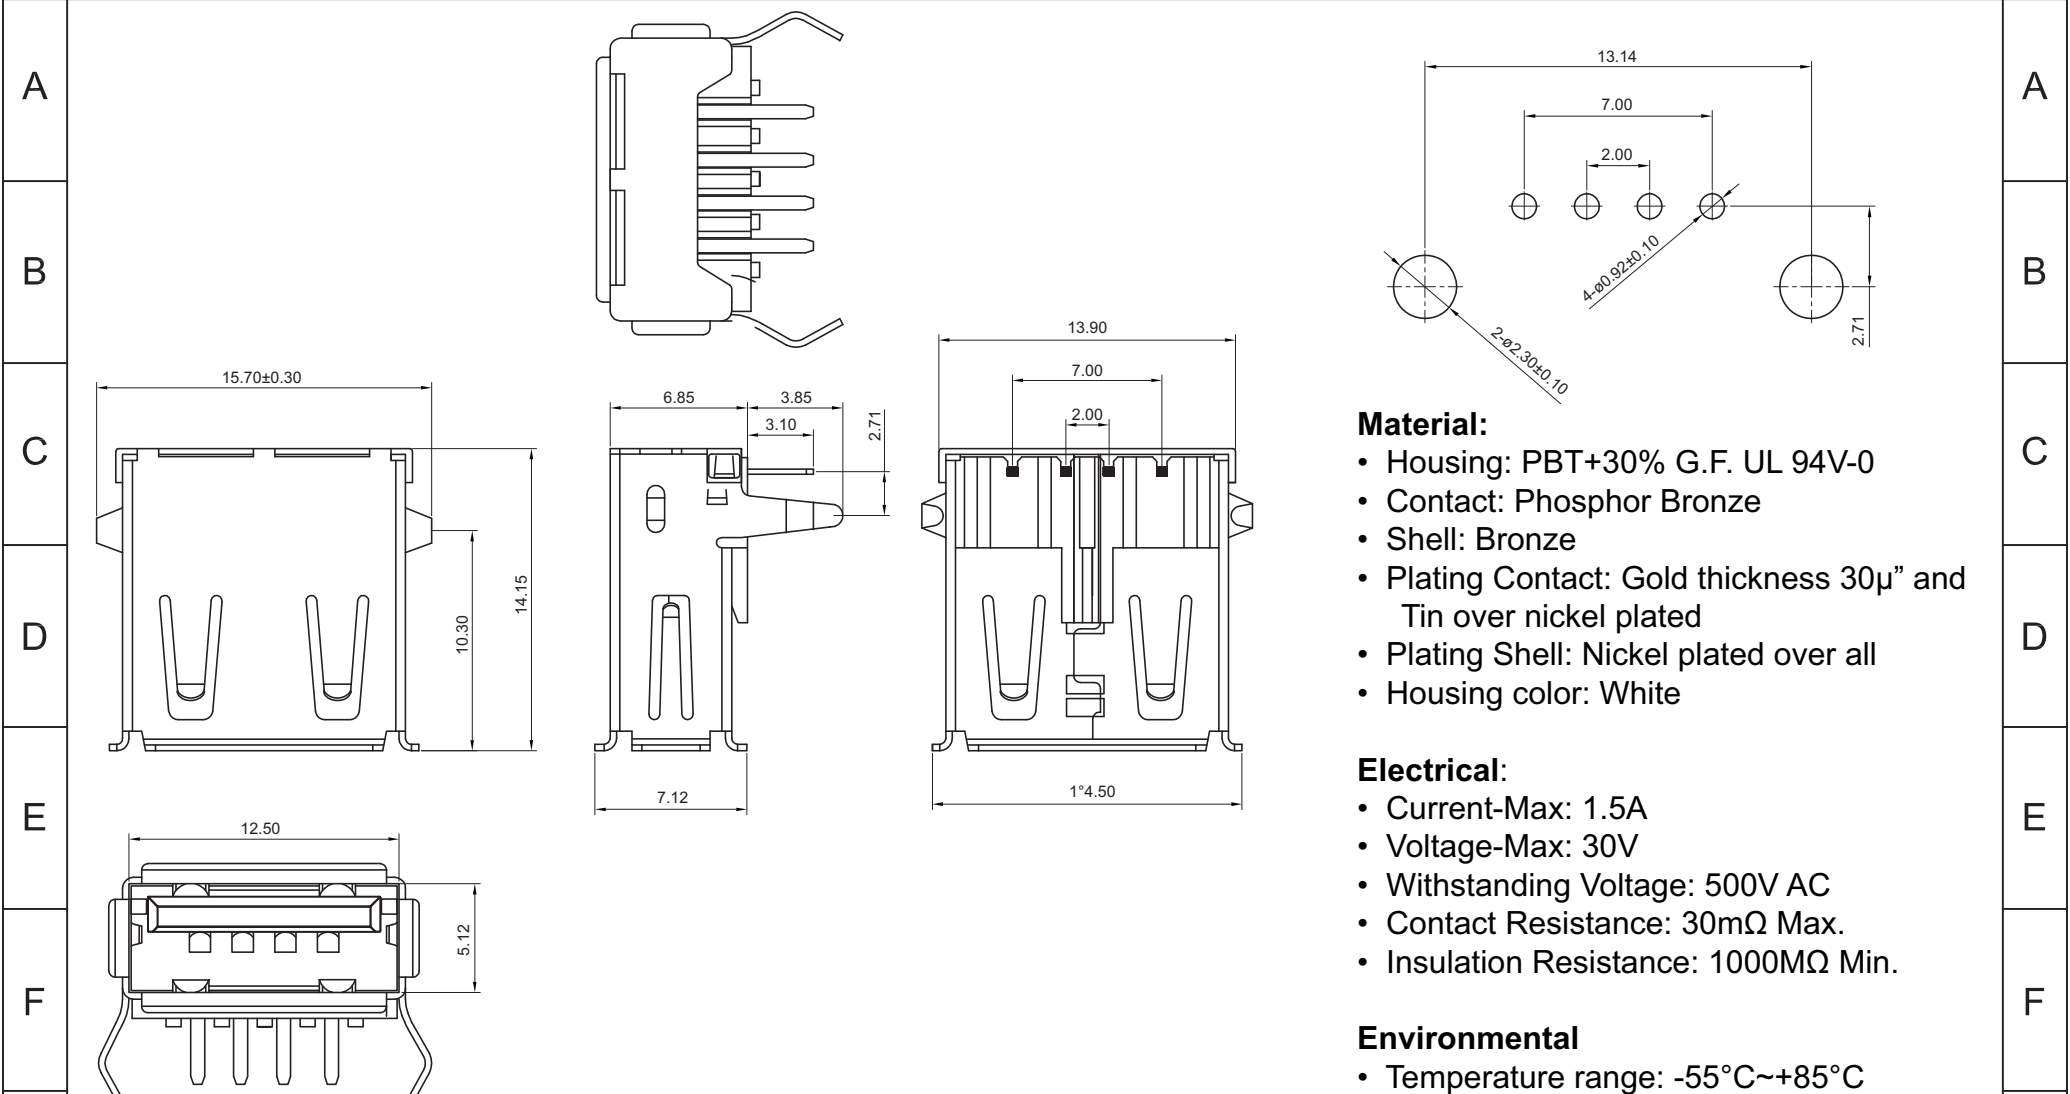

Material:

- Housing: PBT+30% G.F. UL 94V-0
- Contact: Phosphor Bronze
- Shell: Bronze
- Plating Contact: Gold thickness 30µ” and Tin over nickel plated
- Plating Shell: Nickel plated over all
- Housing color: White

Electrical:

- Current-Max: 1.5A
- Voltage-Max: 30V
- Withstanding Voltage: 500V AC
- Contact Resistance: 30mΩ Max.
- Insulation Resistance: 1000MΩ Min.

Environmental

- Temperature range: -55°C~+85°C

Unit: mm



Scale	1:1					Date	Name	Title
TOLERANCE						Drawn	30.11.12	Wilson
X.X	±0.38					Approved	30.11.12	Groll
X.XX	±0.25							
X.XXX	±0.13							
X.X°	±3.0°							
X.XX°	±1.0°	ⓐ						
X.XXX°	±0.5°	Id.	Modification	Date	Name			



1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283
Toll Free: 1-877-277-6266 • Email: info@assmann.us

Title		USB 2.0 A/F DIP 90° Connector for PCB Mount, 30µ” Gold, White	
ASSMANN WSW-No.		AU-Y1005-2-R	
Drawing-No.		rev00	
Replace	Sheet	1/1	

1 2 3 4 5 6 7