



INTERCONNECTS

SERIES 712 • 2,54 GRID CARRIER WITH SOLDER TAIL • SINGLE AND DOUBLE ROW STRIPS

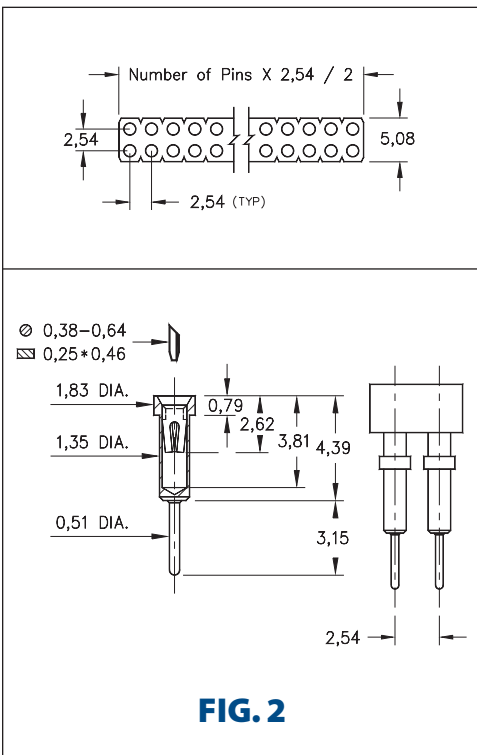

- Standard solder tail receptacles can be mounted as a low profile receptacle or by the solder tail for use in smaller diameter holes
- Series 712 use MM #0255 pins. See page 165 for details
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 253 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

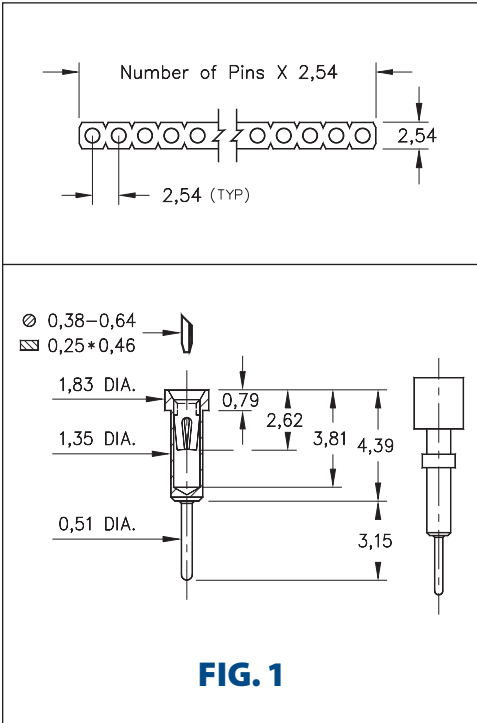

ORDERING INFORMATION

| | |
|---------------|---|
| FIG. 1 | Single Row (0,71 or 1,4 min. mounting holes) |
| | 712-XX-1 -41-001000 Specify number of pins 01-64 |
| FIG. 2 | Double Row (0,71 or 1,4 min. mounting holes) |
| | 712-XX-2 -41-001000 Specify number of pins 04-64 |



XX=Plating Code
See Below

For
Electrical, Mechanical
& Environmental Data,
See page 264

| SPECIFY PLATING CODE XX= | 11 | 13 | 91 | 93 | 41 | 43 |
|--------------------------|-----------|-----------|--------------|--------------|-----------|-----------|
| Sleeve (Pin) | 0,25µm Au | 0,25µm Au | 5,08µm Sn/Pb | 5,08µm Sn/Pb | 5,08µm Sn | 5,08µm Sn |
| Contact (Clip) | 0,25µm Au | 0,76µm Au | 0,25µm Au | 0,76µm Au | 0,25µm Au | 0,76µm Au |

