


| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | COMPONENT NOTES |
|----------|-------------|--|------|-----------------|
| 1 | 50-00574 | Connector, USB A 2.0 Plug, molding style, 180°, nickel plated shell, black insulator | 2 | |
| 2 | 30-00872 | Wire, 4C, 1PR 28 AWG, 2C 26 AWG, UL2725, 30V, 80C, 4.3 mm, shielded, VW-1, PVC, 79A, USB 2.0 | 1 | |
| 3 | 24-00210 | Overmold, plug, USB A, slim design for aluminum shell | 2 | PVC, black |
| 4 | 55-00073 | USB A plug aluminum shell, 13x13.5x5.9 mm | 2 | black |

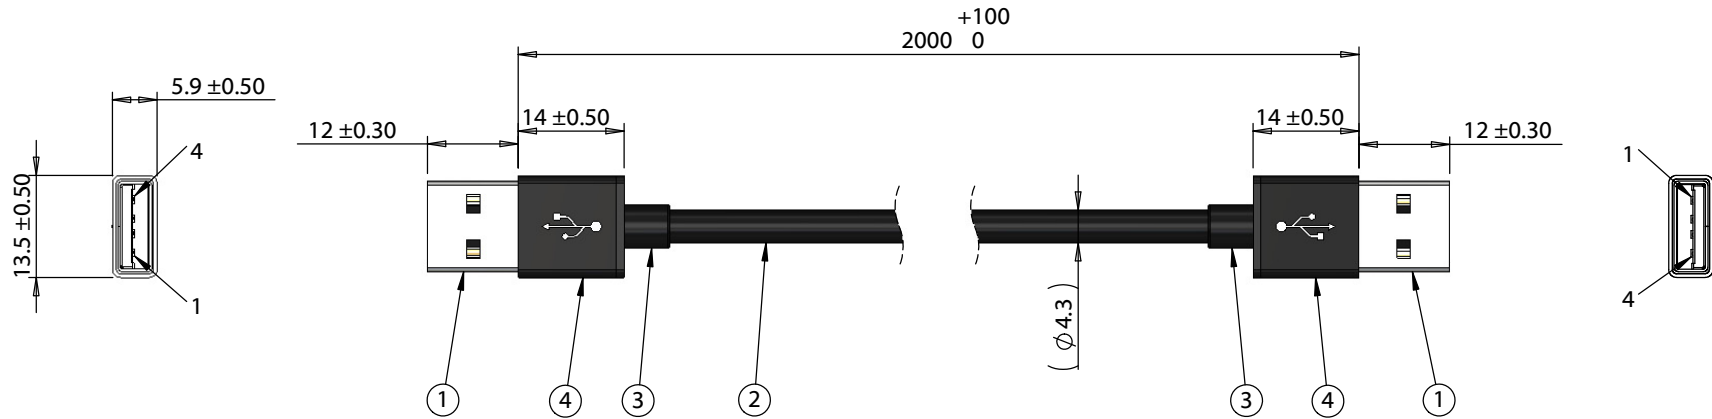

| Wiring diagram | | |
|----------------|----------------|----------|
| 50-00574 | Wire Color | 50-00574 |
| 1 | Red | 1 |
| 2 | White | 2 |
| 3 | Green | 3 |
| 4 | Black | 4 |
| Shell | Drain & Shield | Shell |

Notes:
Functionally equivalent components may be substituted

| | | | | | |
|-----------|----------|-----------------|--|---|---|
| Revision: | Date: | Description: | Prepared: | Notes: RoHS and REACH compliant | TENSILITY tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com |
| A | 1/5/2018 | Initial release | Verified: | | |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm | Description: Cable, 2000 mm, 50-00574 USB A plug to same, 26/28 AWG, 30-00872 wire | Size: A Part number: 10-02327 |
| | | | | | Scale: 1:1 Sheet 1 of 1 |

5

4

3

2

1