


PLUG COMPONENT			PLUG STRIP DIMENSION			SJT 16AWGx3C 60°C Unshielded Black Length 1500±30	END STRIP DIMENSION			CONNECTOR COMPONENT		
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR		R.O.J	R.I.J	COLOR	COLOR	DESCRIPTION	Q'ty
40P BLACK	IH-500(320 C14)	1	6 ⁺¹ ₋₀	19 ± 1	BLACK(L)		6 ⁺¹ ₋₀	15 ± 1	BLACK(L)	40P BLACK	IH-501(320 C13)	1
Nickel-Plated	GEM 98672BS-1	3	6 ⁺¹ ₋₀	19 ± 1	WHITE(N)		6 ⁺¹ ₋₀	15 ± 1	WHITE(N)	True color	Assembly Body 111-001-005	1
BLACK Outer Body	GEM 8671P	1	6 ⁺¹ ₋₀	19 ± 1	GREEN(E)	6 ⁺¹ ₋₀	15 ± 1	GREEN(E)				

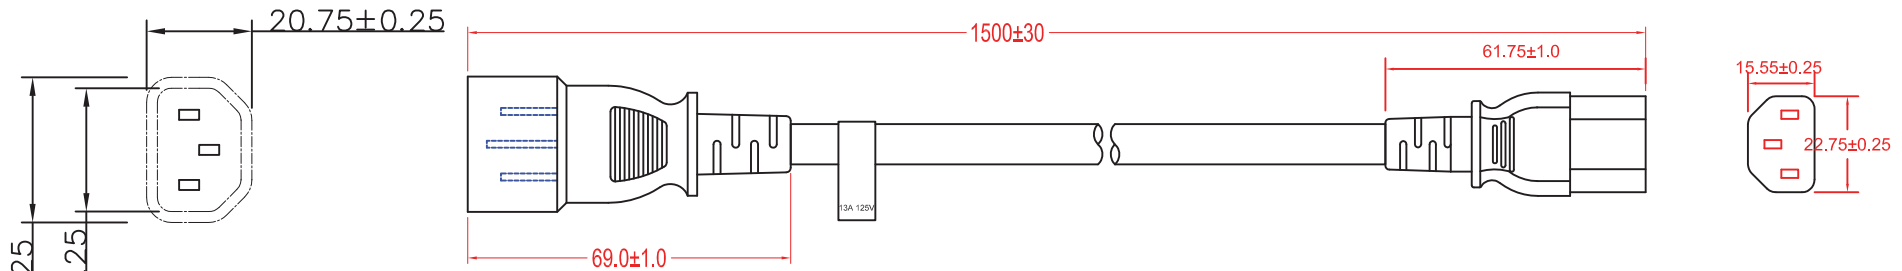


Material:


- SJT 3 x 16AWG(1.31mm²) VW-1, 60°C 300V
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

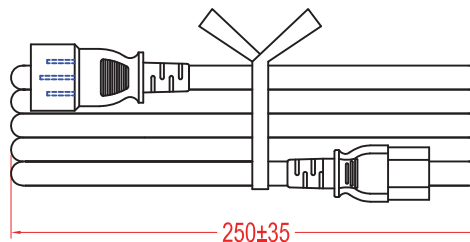

Hank Dimension

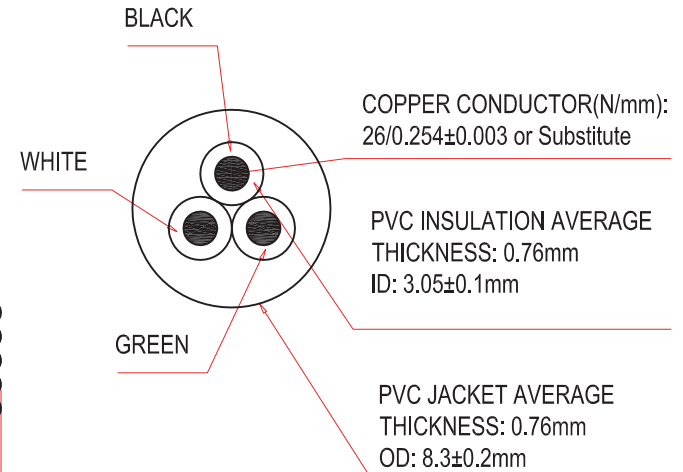

Wire Cross section

Unit: mm



Scale	Free					Date	Name	Title
TOLERANCE						Drawn	10.10.15	Wilson
X.	±X					Approved	10.10.15	Groll
X.X	±X							
X.XX	±X							
DIM	TOL							
X.°	±X°							
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name			

Title		Power Extension cord - SJT 60°C 16AWG M/F, Unshielded 1.5 Meters	
ASSMANN WSW-No.		AK500/16-OE-11-1.5	
Drawing-No.		rev00	
Replace		Sheet 1/1	

