

THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.



Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	14 - 10 AWG STR, 12 - 10 AWG SOL
Wire Type	Stranded Copper; Class B; Compact, Compressed or Concentric, Class C; Concentric
Wire Strip Length	7/16 in.
Stud Size	#10
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90 ° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	N/A
Panduit Die Index No. on Barrel	N/A
Alternate Industry Die Index No. () on Barrel	N/A



LISTED Wire Connector



CERTIFIED

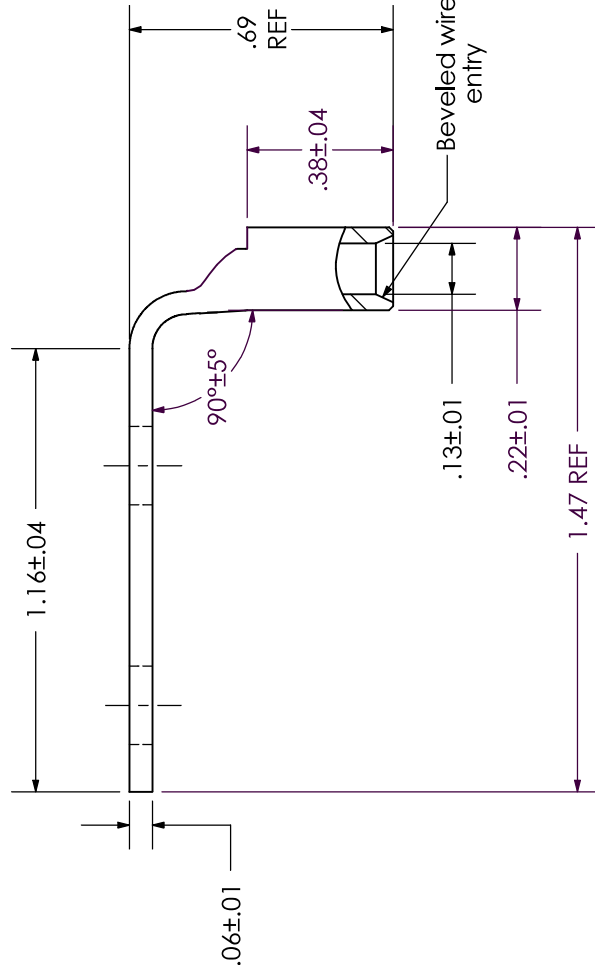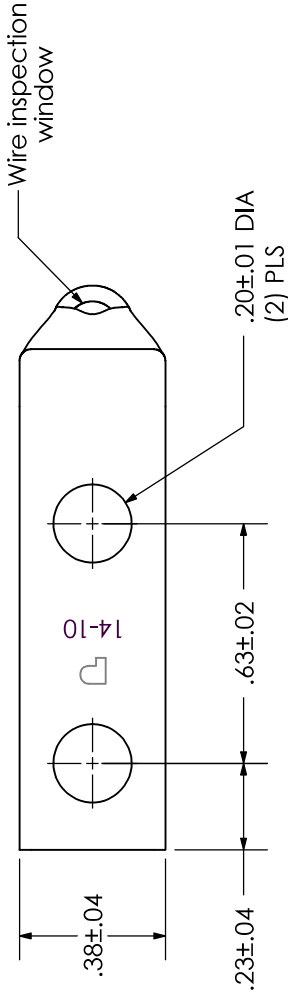

PANDUIT CORP. TINLEY PARK, ILLINOIS

LCD10-10AF-L

Copper Lug - Two-Hole, Standard Barrel, 90° Angle Tongue

SCALE N/A

ECN

DESCRIPTION

REV DATE BY CHK

02 1/09 JHNU JHNU REVISED STUD HOLE TOLERANCE TO +/- .010

DRAWING NO / CAD FILE

LCD10-10AF-CUST