THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

POSITION	LOAD @ "DETENT"	TOLERANCE
0	7.5	+/- 3 LBS
1	9	+/- 3 LBS
2	12	+/- 3 LBS
3	14	+/- 3 LBS
4	19	+/- 3 LBS
5	22	+/- 4 LBS
6	28	+/- 4 LBS
7	32	+/- 4 LBS
8	34	+/- 4 LBS

ACCURACY OF LOAD @ DETENT DEPENDS UPON MATCHING THE INDICATOR LINE EXACTLY WITH THE DESIRED SETTING

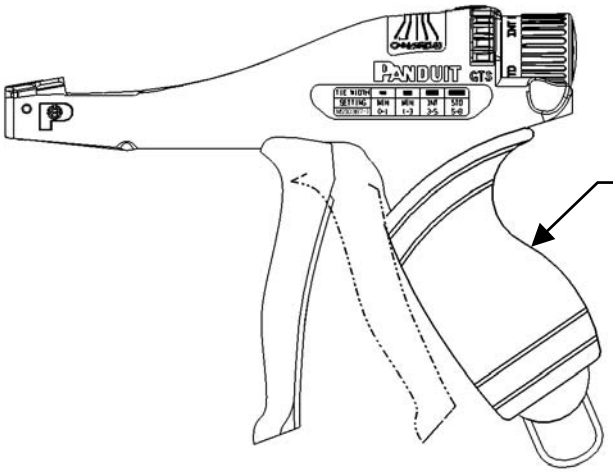

GTS

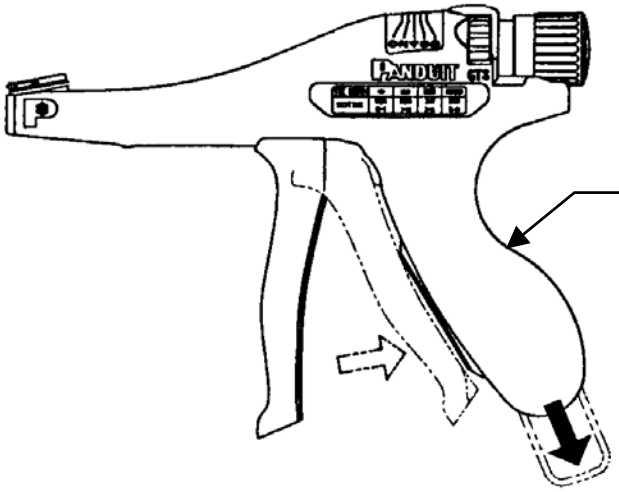

GTSL

REV	DATE	BY	CHK'D	DESCRIPTION	ECN	-R	CUST	SUP
03	4-24-06	PWG	BJPU	ADD: VIEW W/DAMP. SLEEVE	NONE		LAH	
02	1-03-06	BLR	ABJ	ADD: GTSL	NONE	--	BKA	
01	6-03-03	BLR	ABJ	RENAME TO: TENSION ROD FORCE @ DETENT	NONE	--	DLWE	
00	3-25-03	BLR	ABJ	RELEASED	NONE	--	DLWE	

PANDUIT CORP. TINLEY PARK, ILLINOIS

GTS, GTSL
TENSION ROD FORCE @ DETENT

UNLESS OTHERWISE SPECIFIED. DIMENSIONAL
(.x) ± --- (.xxx) ± ---
(.xx) ± --- ANGLES ± ---

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY: BLR
MATL: --------
SCALE: NONE
DATE: 3-25-03
DRAWING NO. WB24707A01
DWG SIZE: A
CHK'D: ABJ