


| REV. | DATE | DESCRIPTION |
|------|----------|--|
| D | 04/11/97 | ADD $\phi 15.75$ BODY DIMENSION |
| E | 01/19/98 | CHANGE TO $\phi 15.57$ BODY DIMENSION |
| F | 03/19/05 | UPDATE DRAWING FORMAT/ CHANGE STRIPPING DIMS |
| G | 02/08/06 | UPDATE ITEM (5) TO FLAT WASHER. |
| H | 03/20/07 | REVISE PLATING TO NEXCOTE |

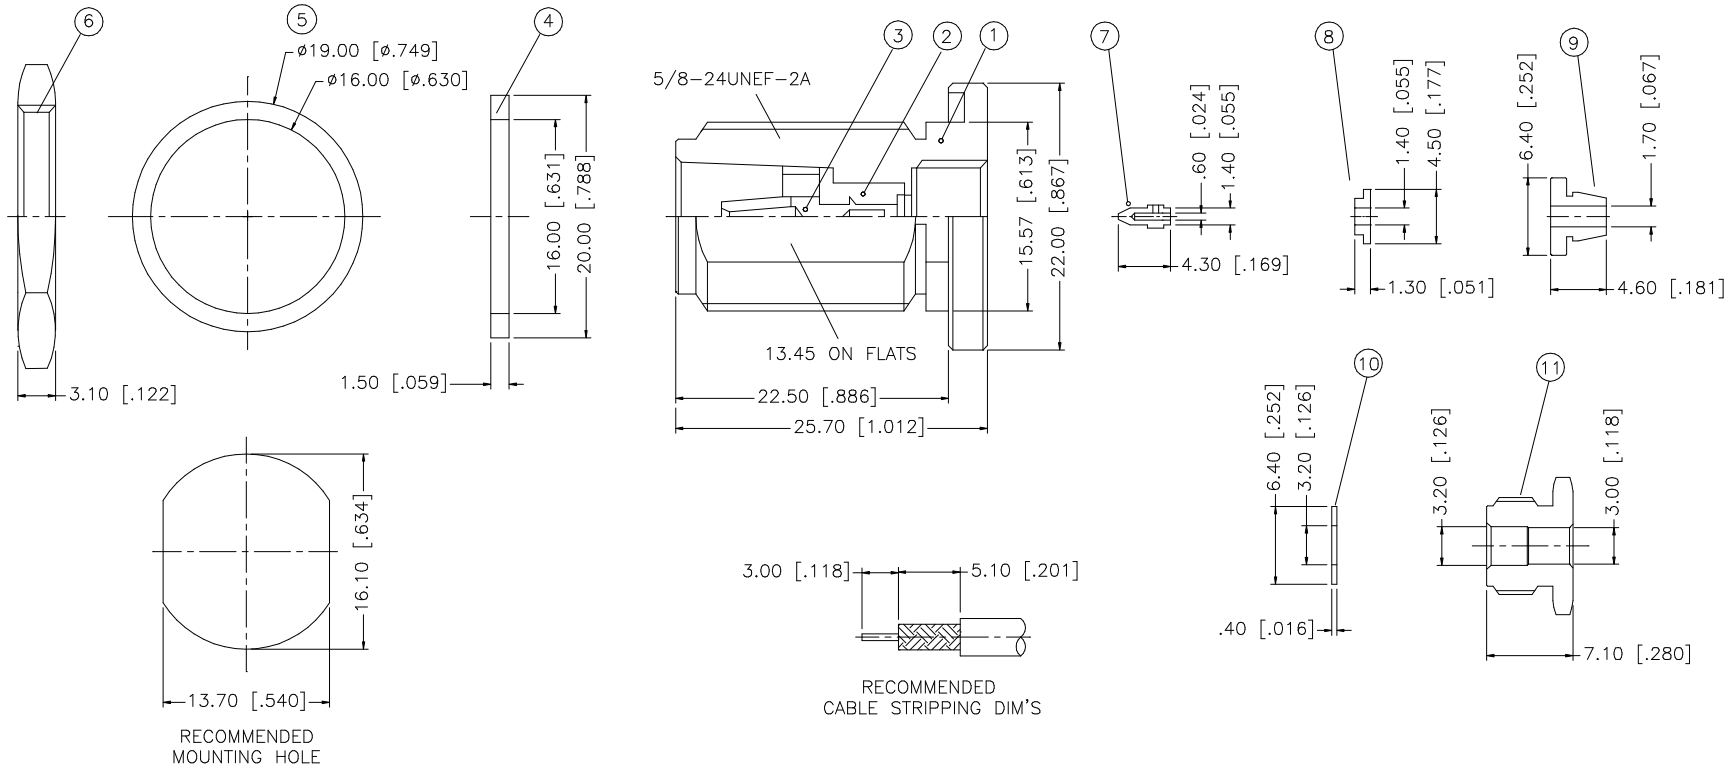

NOTE:

- CONTACT PIN TO SOLDER
- MAX. PANEL THICKNESS = 6.5mm

| | | | | |
|----|-------------|-------------|---------|-----|
| 12 | | | | |
| 11 | HEX NUT | BRASS | NEXCOTE | 1 |
| 10 | WASHER | BRASS | NEXCOTE | 1 |
| 9 | TOP HAT | BRASS | NEXCOTE | 1 |
| 8 | INSULATOR | TEFLON | NATURAL | 1 |
| 7 | CONTACT PIN | BRASS | GOLD | 1 |
| 6 | HEX NUT | BRASS | NEXCOTE | 1 |
| 5 | FLAT WASHER | BRASS | NEXCOTE | 1 |
| 4 | GASKET | SILICONE | RED | 1 |
| 3 | CONTACT PIN | BER. COPPER | GOLD | 1 |
| 2 | INSULATOR | TEFLON | NATURAL | 1 |
| 1 | BODY | BRASS | NEXCOTE | 1 |
| | DESCRIPTION | MATERIAL | FINISH | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20 mm
8 - 30mm ± 0.40 mm
30 - 120mm ± 0.50 mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007 "
.315 - 1.180 = ± 0.015 "
1.180 - 4.724 = ± 0.020 "

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|--------------|-------------------|
| DRAWN G.R.S. | 03/20/07 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |
| CAD FILE | C:/172/172143.DWG |

Amphenol Connex

N BULKHEAD CLAMP JACK
(FOR RG-174/U,188A/U,316/U)

172143

| PART DESCRIPTION | PART NO. | DWG. NO. | REV. | SIZE | SCALE |
|--|----------|------------|------|------|-------|
| N BULKHEAD CLAMP JACK (FOR RG-174/U,188A/U,316/U) | 172143 | 172143.DWG | H | A | NA |